

136 to 480MHz – 8 Way Power Divider/Splitter

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Freq.Range (MHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Input Max	VSWR Output Max	Phase Unbalance	Amplitude Unbalance	Power (W)		Connector Type	Temp.(°C)
								Forward	Reverse		
UIY8PD245174A 136T480SF	136 ~ 480	0.8 (Split 9dB)	18	1.5	1.4	≤8°	≤0.8dB	20	3	SMA-F	-30 ~ +70
UIY8PD245174A 136T480BF	136 ~ 480	0.8 (Split 9dB)	18	1.5	1.4	≤8°	≤0.8dB	20	3	BNC-F	-30 ~ +70

- 2 Listed are specific frequency ranges and other tailor-made ranges are available.
 2 Please provide the below information when inquiring and mark * is required.
 * 1. The specific frequency ranges.
 2. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

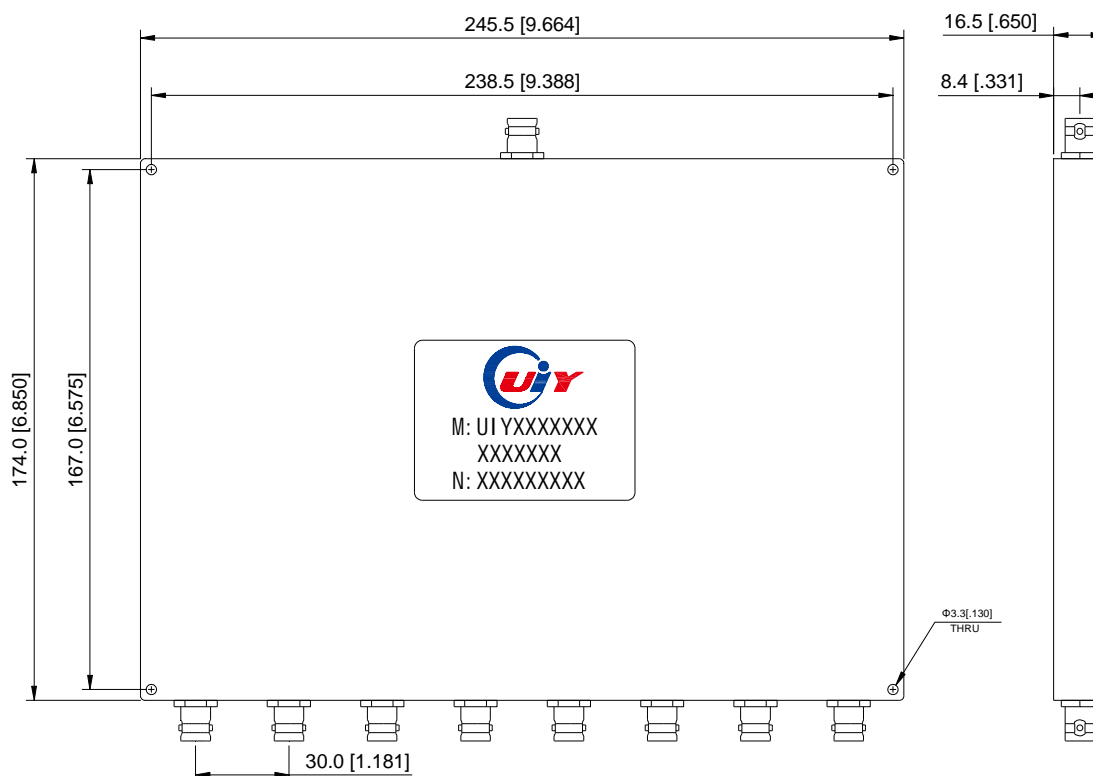

Unit: mm/ inch, General part tolerance is ±2% unless otherwise stated.

Ver. 5