

851 to 894MHz – Band Pass Filter

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Pass Band (MHz)	Insertion Loss Max(dB)	Passband Flatness Max(dB)	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYBPF10664A 851T894NF	851 ~ 894	1.5	1.0	1.3	≥50dB@910~2000MHz	100	N-F	-40 ~ +85
UIYBPF10664A 851T894SF	851 ~ 894	1.5	1.0	1.3	≥50dB@910~2000MHz	100	SMA-F	-40 ~ +85

- 2 Listed are specific frequency ranges and tailor-made ranges are available.
- 2 Please provide the below information when inquiring and mark * is required.
- * 1. The specific pass band frequency range
 - * 2. The specific rejection and frequency
 - 3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

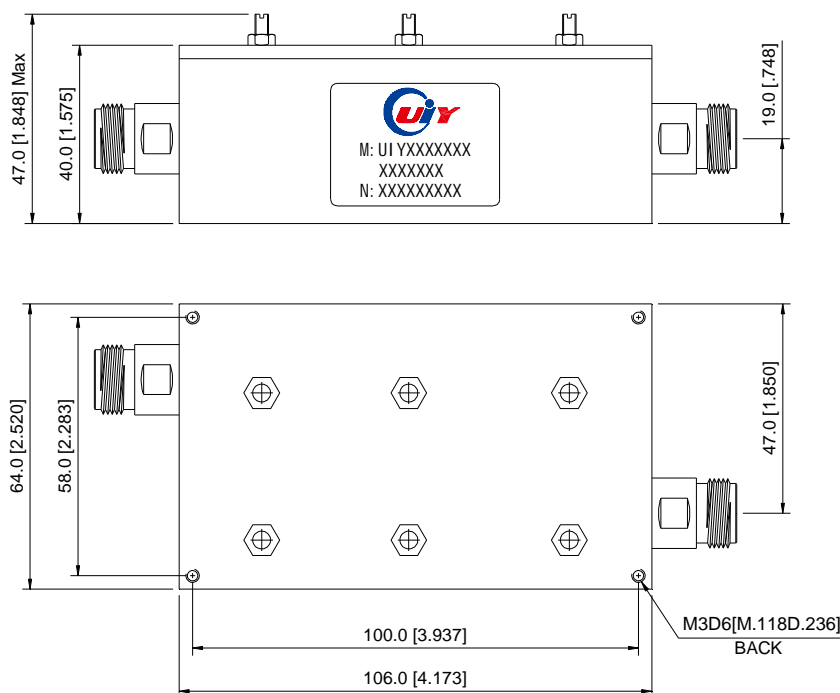

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5