

300W – Coaxial Termination

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Custom design available upon request.
- ◆ Military, space and commercial applications.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Freq. Range	Power	VSWR Max	Connector Type	Impedance
UIYCT300AN3	DC-3GHz	300W	1.2	N Male	50 Ω
UIYCT300ANF3		300W	1.2	N Female	50 Ω
UIYCT300AD3		300W	1.25	7/16 Male	50 Ω
UIYCT300ADF3		300W	1.25	7/16 Female	50 Ω
UIYCT300AN6	DC-6GHz	300W	1.3	N Male	50 Ω
UIYCT300ANF6		300W	1.3	N Female	50 Ω
UIYCT300AD6		300W	1.3	7/16 Male	50 Ω
UIYCT300ADF6		300W	1.3	7/16 Female	50 Ω

- 2 Listed are specific frequency ranges and tailor-made ranges available.
 2 Please provide the information below when inquiring and mark * is required.
- * 1. Power handling
 - 2. Connect type (SMA Male/ Female, N Male/ Female, etc.)
 - 3. Other special requests (VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

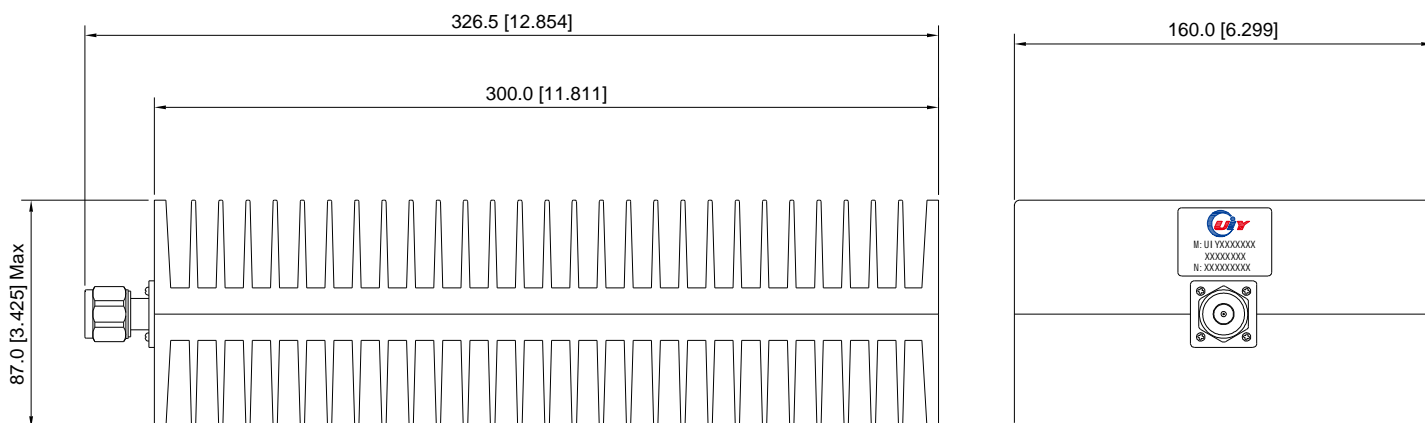

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5.2