


136 to 480MHz – Low Noise Amplifier

UIYLNA7825D136T480NF

RF Characteristics @T=25°C, VDD=+12VDC; 50Ω System					
Parameter	Symbol	Min	Type	Max	Unit
Operating Frequency	BW	136		480	MHz
Power Output CW	Po		0	5	dBm
Power @1dB	P1dB		20		dBm
Output Third Order Intercept Point	3rdOIP		36		dBm
Power Gain @CW	G	19	20	21	dB
Input Power	Pin		-10	-5	dBm
Gain Flatness	ΔG		±1.0		dB
Input VSWR	S11		1.5:1		
Odd Harmonics @CW	H	-15	-20		dBc
Even Harmonics @CW	H	-15	-20		dBc
Noise Figure	NF		1.0	1.5	dB
Spurious Signals	Spur		-60		dBc
Operating Voltage	VDC	8	12	15	Volt
Current Consumption@ Po=-10dBm	I _b		100	150	mA
Operating Temperature	T _c	-40		+60	°C
Storage Temperature	T _{stg}	-55		+70	°C

✧ Listed are specific frequency ranges and other ranges are available.
 ✧ Please provide the below information when inquiring and mark * is required.
 * 1. The specific pass band frequency range
 * 2. The specific Gain and Power
 * 3. Other special requests.

Mechanical Drawing

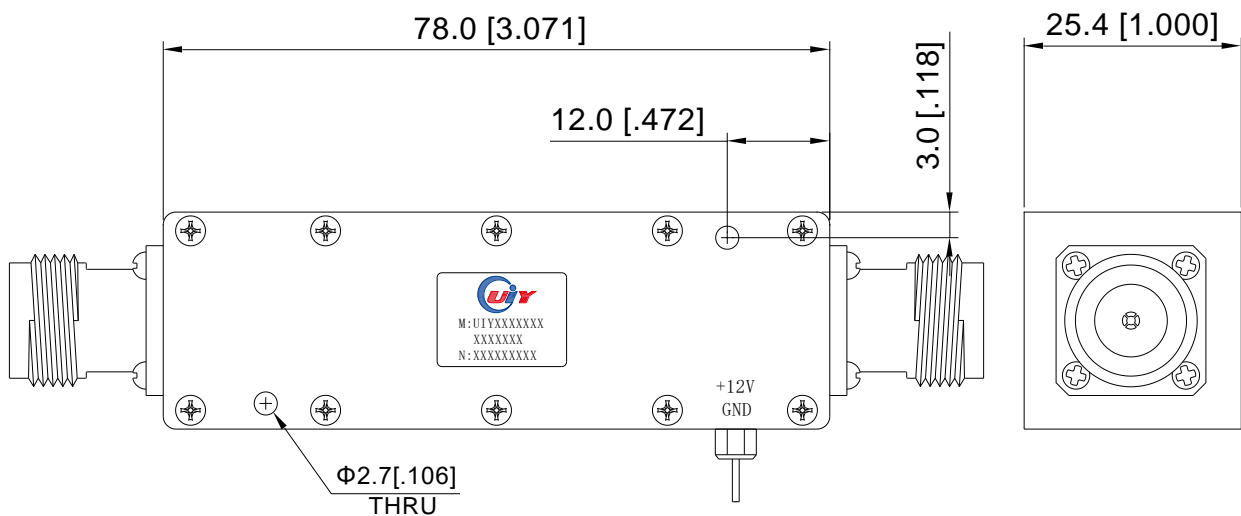

Unit: mm/ inch, General part tolerance is ±2% unless otherwise stated.

Ver. 5.1