

500 to 2500MHz 25W – Power Amplifier


UIYPA14070A500T2500SF

RF Characteristics @T=25°C, VDD=+36VDC; 50Ω System					
Parameter	Symbol	Min	Type	Max	Unit
Operating Frequency	BW	500		2500	MHz
Power Output CW	Po		25		W
Power @1dB	P1dB		12		W
Power Gain @CW	G		40		dB
Gain Flatness	ΔG		±2.0		dB
Input/Output VSWR	S11/S22		2:1	2.5:1	
Odd Harmonics @CW	H	8	10		dBc
Even Harmonics @CW	H	20	22		dBc
Spurious Signals	Spur	65	70		dBc
Operating Voltage	VDC		36		Volt
Current Consumption	I		2.5		A
Operating Temperature	Tc	-25		+55	°C
Storage Temperature	Tstg	-55		+85	°C
Thermal Overload	Tod		85°C		Max
VSWR Overload	VSWR		3:1		Max
Imax Overload	Imax		4A		Max
RFin-max Overload	RFin-max		10dBm		Max
Interface Connector			DB-9		
Connector Type			SMA		

✧ Listed are specific frequency ranges and other ranges are available.
 ✧ Please provide the below information when inquiring and mark * is required.
 * 1. The specific pass band frequency range
 * 2. The specific Gain and Power
 * 3. Other special requests.

Mechanical Drawing

Note: External heatsink is needed in this module

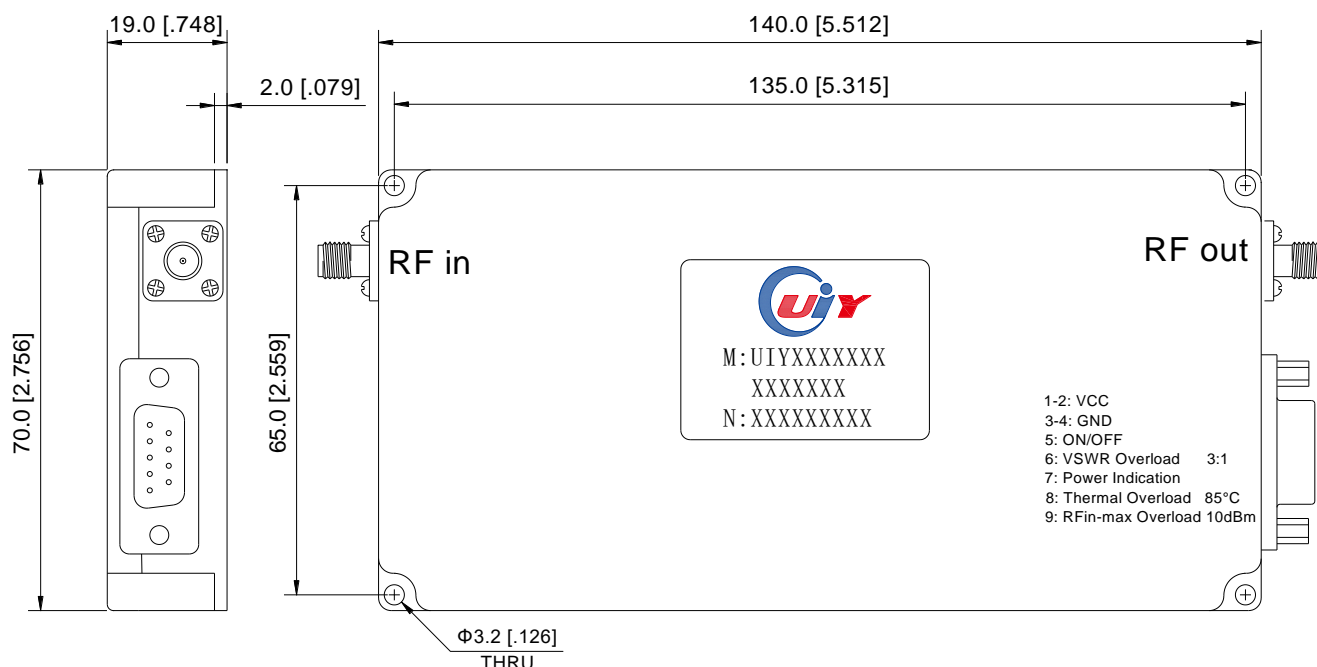



Unit: mm/ inch, General part tolerance is ±2% unless otherwise stated.

Ver. 5

Test Data

UIYPA14070A500T2500SF

RF Characteristics @T=25°C, VDD=+36VDC; 50Ω System				
Freq. Range (MHz)	Output Power (W)	Current (A)	Gain (dB)	Input VSWR
0.5	44.4	2.1	40.6	1.4
0.7	44.3	2.1	39.7	1.4
0.9	44.5	2.3	39.9	1.4
1.1	44.1	2.7	39.7	1.5
1.3	44.4	2.6	38.4	1.4
1.5	44.5	2.9	39.5	1.5
1.7	44.9	2.9	40.9	1.4
1.9	44.4	2.5	39.4	1.5
2.1	44.1	2.4	39.1	1.6
2.3	44.2	2.9	38.2	1.6
2.5	44	2.8	38.8	1.7

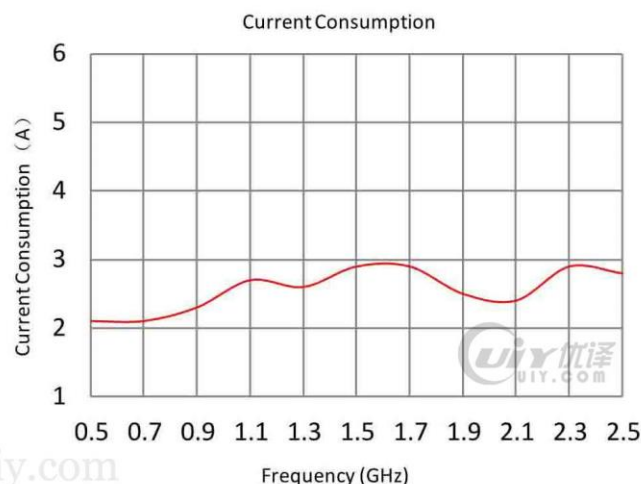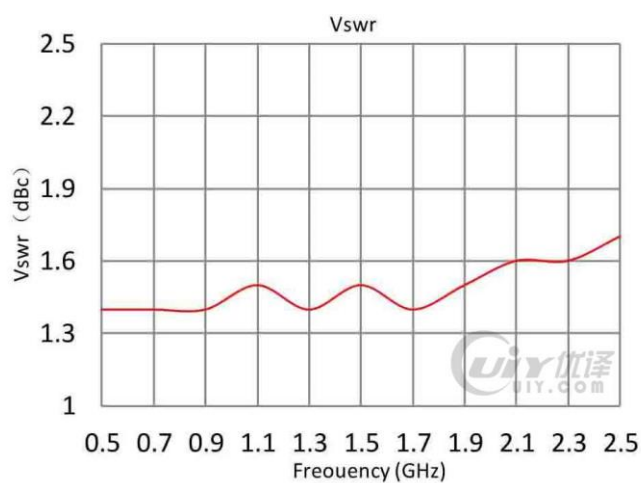

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5